


Quick Start Guide


PM352

Device Parts

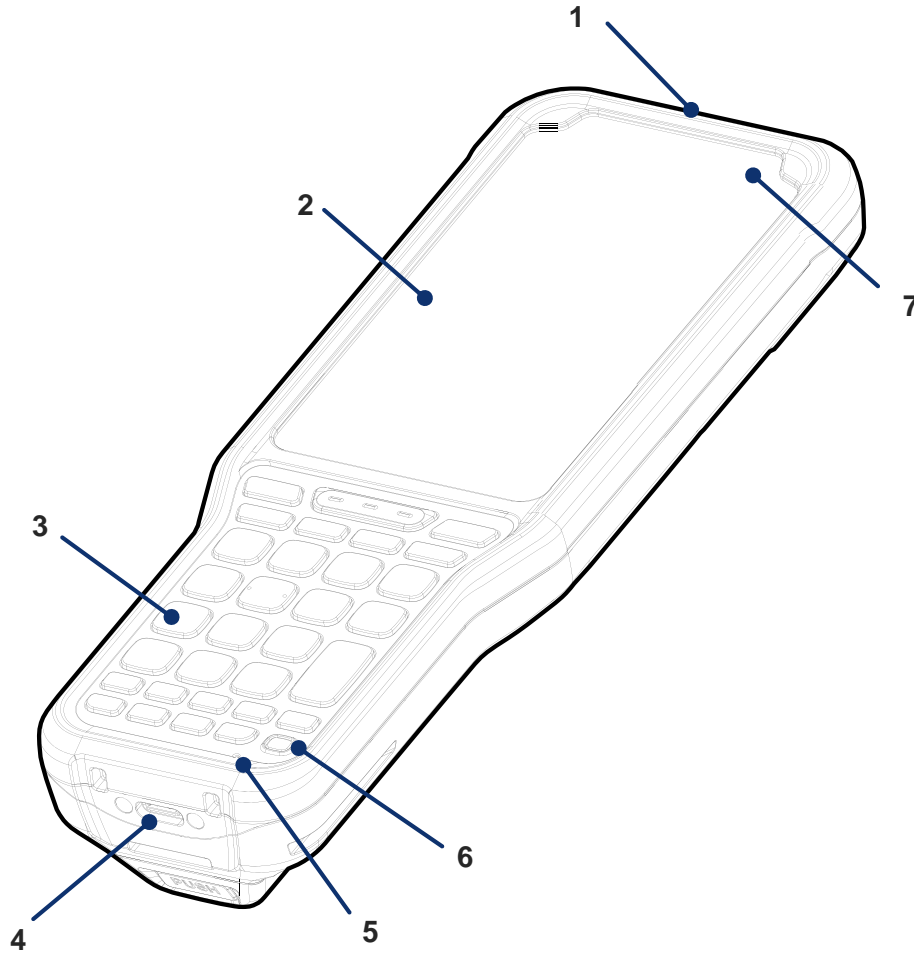


1. Scanner & Camera
2. Touch screen
3. Keypad
4. USB connector
5. Microphone
6. Power button
7. LED indicator

Device Parts

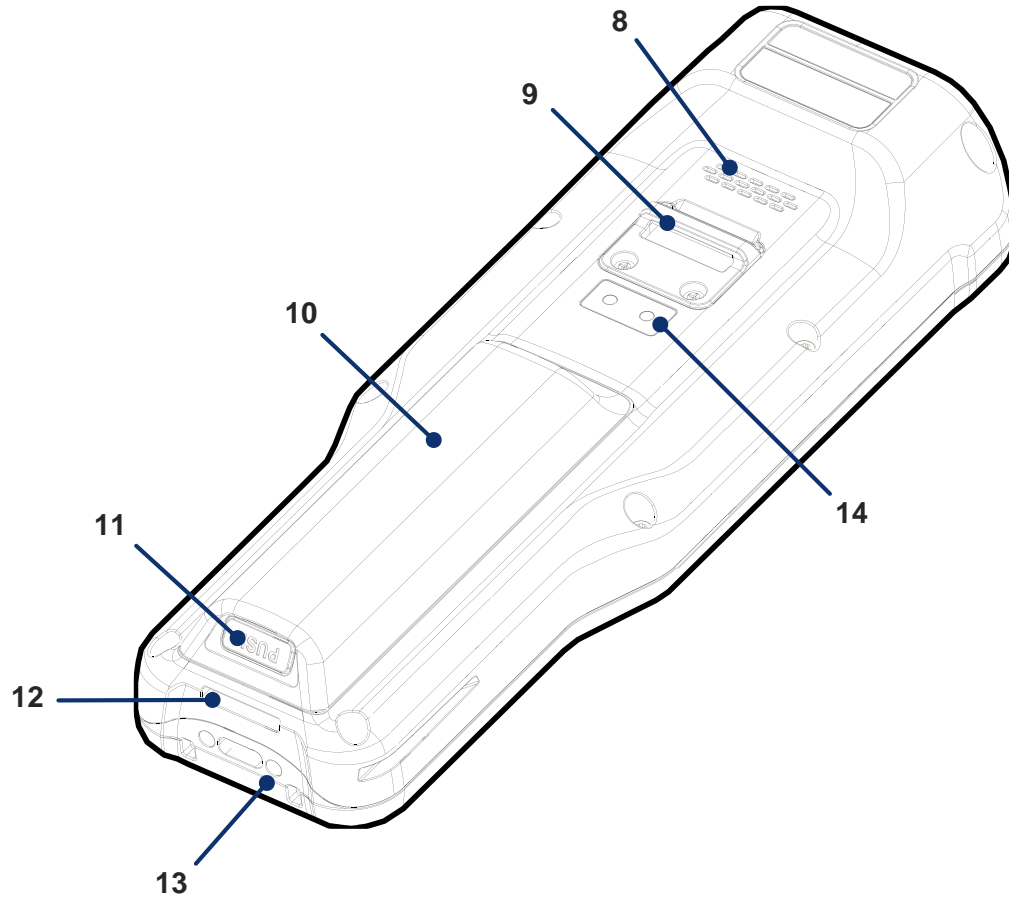

- 8. Speaker
- 9. Hand strap hole (Top)
- 10. Battery
- 11. Battery release button
- 12. Hand strap hole (Bottom)
- 13. I/O connector (Bottom)
- 14. I/O connector (Rear)

Product Standard Accessories



Battery pack



Charger



AC Plug



Stylus pen



Hand strap




LCD protection film

Battery Replacement

Install Battery


Caution: Make sure the SIM and SD card holders are completely closed before installing the battery.

1. Insert the battery from the top side (opposite side of the battery release button).
2. Push the battery down until it clicks.
Check if the battery release buttons are completely outward.

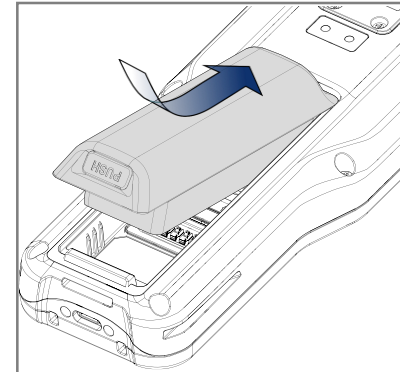

Remove Battery

Pull up the bottom side of the battery while pressing the battery release button.




Installing SIM, SD card

PM352 supports

- 1 micro SD card slot
- 1 micro SIM card slot - WWAN (LTE) SKU only


SIM card

1. Gently slide the cardholder up, and swing it upwards.
2. Put the SIM card facing down the gold contact.
3. Close the holder down and slide it down to lock.

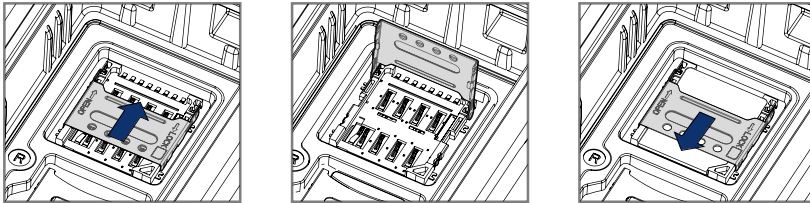

SD card

1. Gently slide the cardholder down, and swing upwards.
2. Put the SIM card facing down the gold contact.
3. Close the holder down and slide it up to lock.

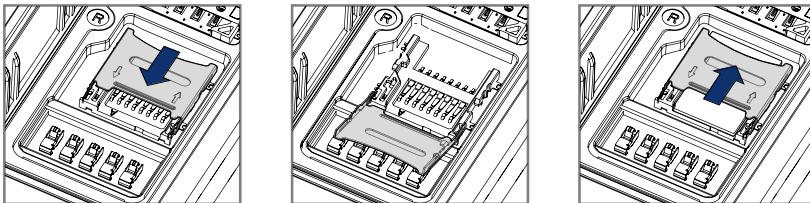

Turning on / off



Numeric



Alpha-Numeric

Turn on


Press and hold the **Power** button on the keypad until **SMART BEYOND RUGGED** logo displays on the screen.

Turn off

When the screen is on, press and hold the **Power** button until the power menu is shown.

Then, tap **Power off** among the menu.

Charging the Device

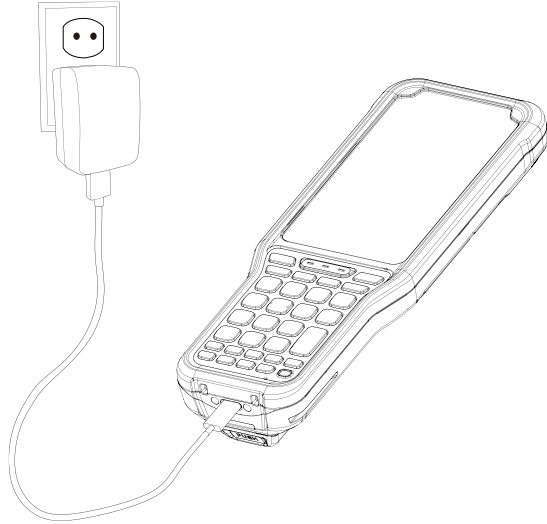


1. Assemble a proper country plug and the charger, and rotate the plug clockwise to engage firmly.
2. Connect the cable to the USB connector of PM352.
3. Provide power by plugging the charger to the wall socket.

PM352 can also be charged with a charging cradle. The cradles are sold separately and can be used in common with PM351.

< Caution >

1. Always use an original charger from Point Mobile. Other chargers may damage the PM352. The device warranty does not cover any damage caused by the usage of non-original power supplies.
2. Make sure the charger is not wet.
3. Charge in temperatures from 0°C to 45°C.

LED Indicator

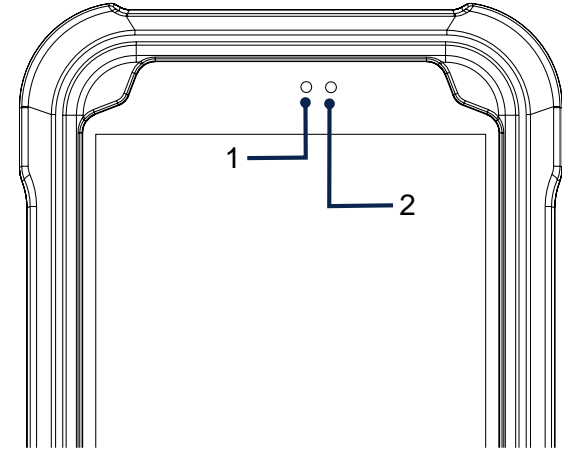


No	Indicator	Status	Indication
1	Power LED	Solid green	Device is fully charged
		Solid red	Charging the device / Battery is low
		Blinking red	Charging temperature is out of normal range / Battery is very low
		Alternately blinking red & green	Cannot recognize the battery
2	Notification LED	Solid red	Device entered hot swap mode
		Blinking blue	Notification existing
		Red flash	Barcode reading failed
		Blue flash	Barcode reading success

Using Keypad Backlight


Turn on the keypad backlight when the keypad is not visible in a dark place.

1. Go to **Settings**  > **Display**.
2. Turn the **Keyboard Backlight** switch on.

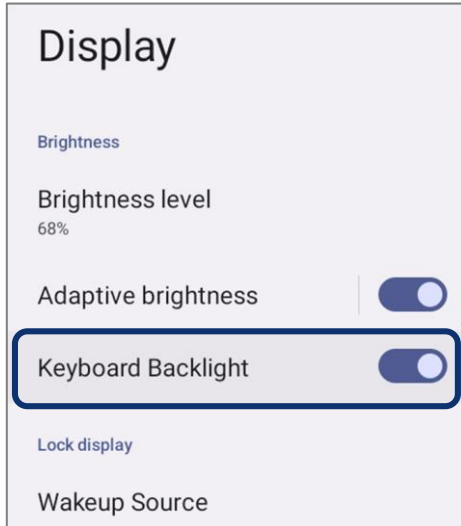





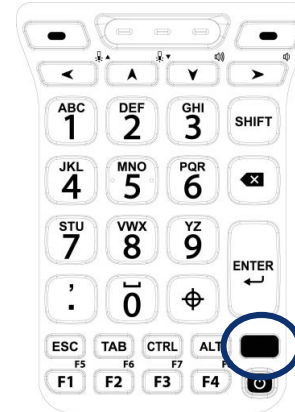

Using Keypad Functions

Numeric (Alpha Key)




Alpha-Numeric (Function Key)




Function	Key Combination	
	Numeric	Alpha-Numeric
 Volume down	Alpha + Right	Fn + P
 Volume up	Alpha + Down	Fn + J
 Display brightness down	-	Fn + K
 Display brightness up	-	Fn + E
 Keyboard backlight brightness down	Alpha + Up	
 Keyboard backlight brightness up	Alpha + Left	

Scan a Barcode

Scanner is enabled by default. If the scanner is not enabled, turn on the scanner from **ScanSettings** first.


Check if the scanner icon  is placed on the Status bar. Then, press a scan button to scan a barcode.

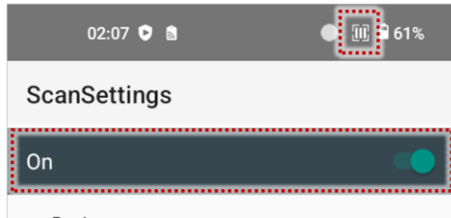

Center the aimer (laser bar or green dot) over the barcode.



SE965 Scanner SKU



SE4100 Scanner SKU



SE4750SR Scanner SKU

Certification

- Model: PM352
- Trade name of certified: Point Mobile Co., Ltd.
- Manufacturer : Point Mobile Co., Ltd.
- For more certificate information, go to **Settings > About phone > Certificates**.

Support

- ARS : +82-1800-3010
- FAX : +82-3397-7872
- Address : 26F, Gasan Publik Building A, 178, Digital-ro, Geumcheon-gu Seoul, Korea 08513
- Website : <https://www.pointmobile.com>
- E-Mail : pm_ta@pointmobile.com